



3D Sense Pro Vape Detection

Specially Designed for Educational Institutions

WT-15391

KEY FEATURES

Operating Temperature	32°F – 104°F (0°C – 40°C)
Operating Humidity	0 to 90% Relative Humidity (non-condensing)
Power Supply	PoE (IEEE 802.3af Class 3 Compliance) 9W 48V Can be powered by a PoE/PoE+ injector or switch
Dimensions	Diameter: 6.21" Height 1.85"
Mounting Options	Ceiling Flush Mount For ceiling tiles, use a toggle bolt and anchor. For sheetrock ceilings with no studs, use a hollow wall anchor and screw. For walls, secure to a stud and wrap Ethernet cord around.
Alert Options	Particulate Anomalies: Vaping, Smoking, other high particulate occurrences Other Air Quality: VOCs, Temp., Relative Humidity, PM1.0, PM2.5, PM4 and PM10 Tampering (sensor detects device movement) (siren and electronic alert) Keywords: "Help," "Stop," "Shooter" Noise Anomalies: Sudden loud noise
Alert Methods	SMS Text Message, Email, App Push Notifications Unlimited alerts and recipients with an active subscription

OPTIONAL ACCESSORIES




PoE/PoE+ Injector



8 Port PoE Switch



16 Port PoE Switch

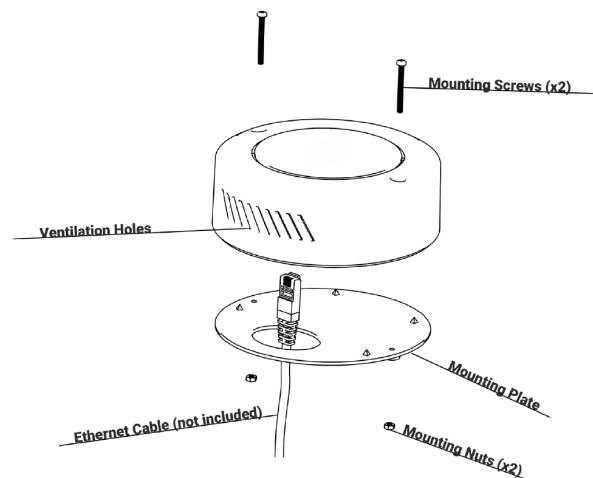

*All logos & trade marks represent the registered users only. All rights reserved.
*All product specifications on this brochure are subject to change without notice.

CANADA:
351 Ferrier Street Unit 5
Markham, Ontario L3R 5Z2
Tel: 416-410-6865
Toll Free: 1-866-843-6865

USA:
171 Cooper Ave.
Suite 110 Tonawanda,
NY 14150 USA
Tel: 1-716-877-7277
Toll Free: 1-866-843-6865

MIDDLE EAST:
PO Box No 126312
Office Suite 703 Oxford Tower
Business Bay Dubai, UAE
Tel: + 971 4 2767117

www.watchnetinc.com
info@watchnetinc.com